Changes : VAR and RWY NR.

ARP : 67 01 01.09N 050 41 21.57W on RWY, 146 M from THR 27	AD ELEV : 165	ELEV in FT Distances in M	Sondrestrom APP : 126.200 Sondrestrom TWR : 118.300

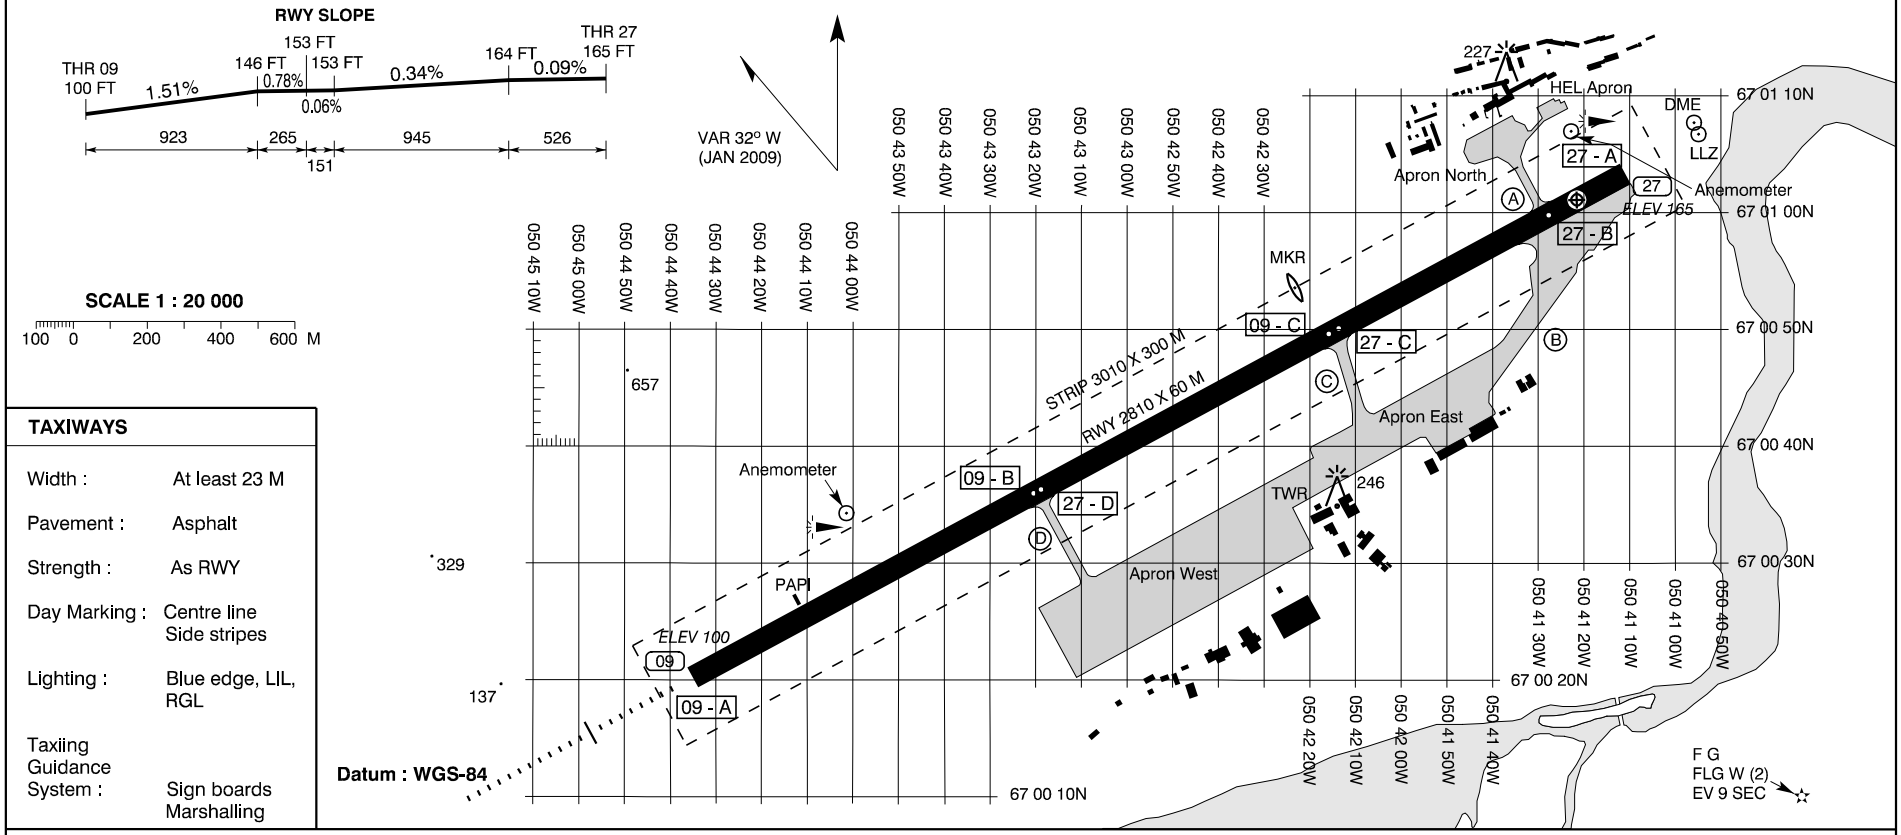

TAXIWAYS

Width :	At least 23 M
Pavement :	Asphalt
Strength :	As RWY
Day Marking :	Centre line Side stripes
Lighting :	Blue edge, LIL, RGL
Taxiing Guidance System :	Sign boards Marshalling

RUNWAYS

NR	Direction	THR PSN	Pavement Strength	Day Marking	Declared Distances					APCH and RWY Lighting (Unless otherwise stated lighting is LIH adjustable)				
					PSN	TORA	TODA	ASDA	LDA	APCH	THR	PAPI	Edge	End
09	061.6° GEO 093.6° MAG	67 00 20.20N 050 44 35.04W	Asphalt Landing gear — 1 MAY - 30 NOV / 1 DEC - 30 APR S Single wheel 36 000 Lbs T Twin wheel 157 000 Lbs ST Single tandem 175 000 Lbs TT Twin tandem 332 000 Lbs SBTT Single belly tandem 590 000 Lbs DDT Double dual tandem 840 000 Lbs TDT Twin delta tandem 840 000 Lbs No restrictions	THR, TDZ, RWY NR, Centre line, Edge	09 - A 09 - B 09 - C	2810 1783 894	2810 1783 894	2810 1783 894	2810	671 M White including 366 M	Green	3.2° MEHT 69 FT	2810 M White	Red
27	241.6° GEO 273.6° MAG	67 01 03.34N 050 41 10.94W			27 - A 27 - B 27 - C 27 - D	2810 2579 1946 1049	2810 2579 1946 1049	2810 2579 1946 1049	2810		Green		2810 M White	Red

OTHER : Secondary Power Supply : Yes, switch-over time 30 SEC

OBSTACLES : All obstacles on and near the aerodrome are provided with red lights

© CAA - DENMARK / SLV - DANMARK