


AERODROME CHART - ICAO

AD 2 - EKOD
ADC
Odense

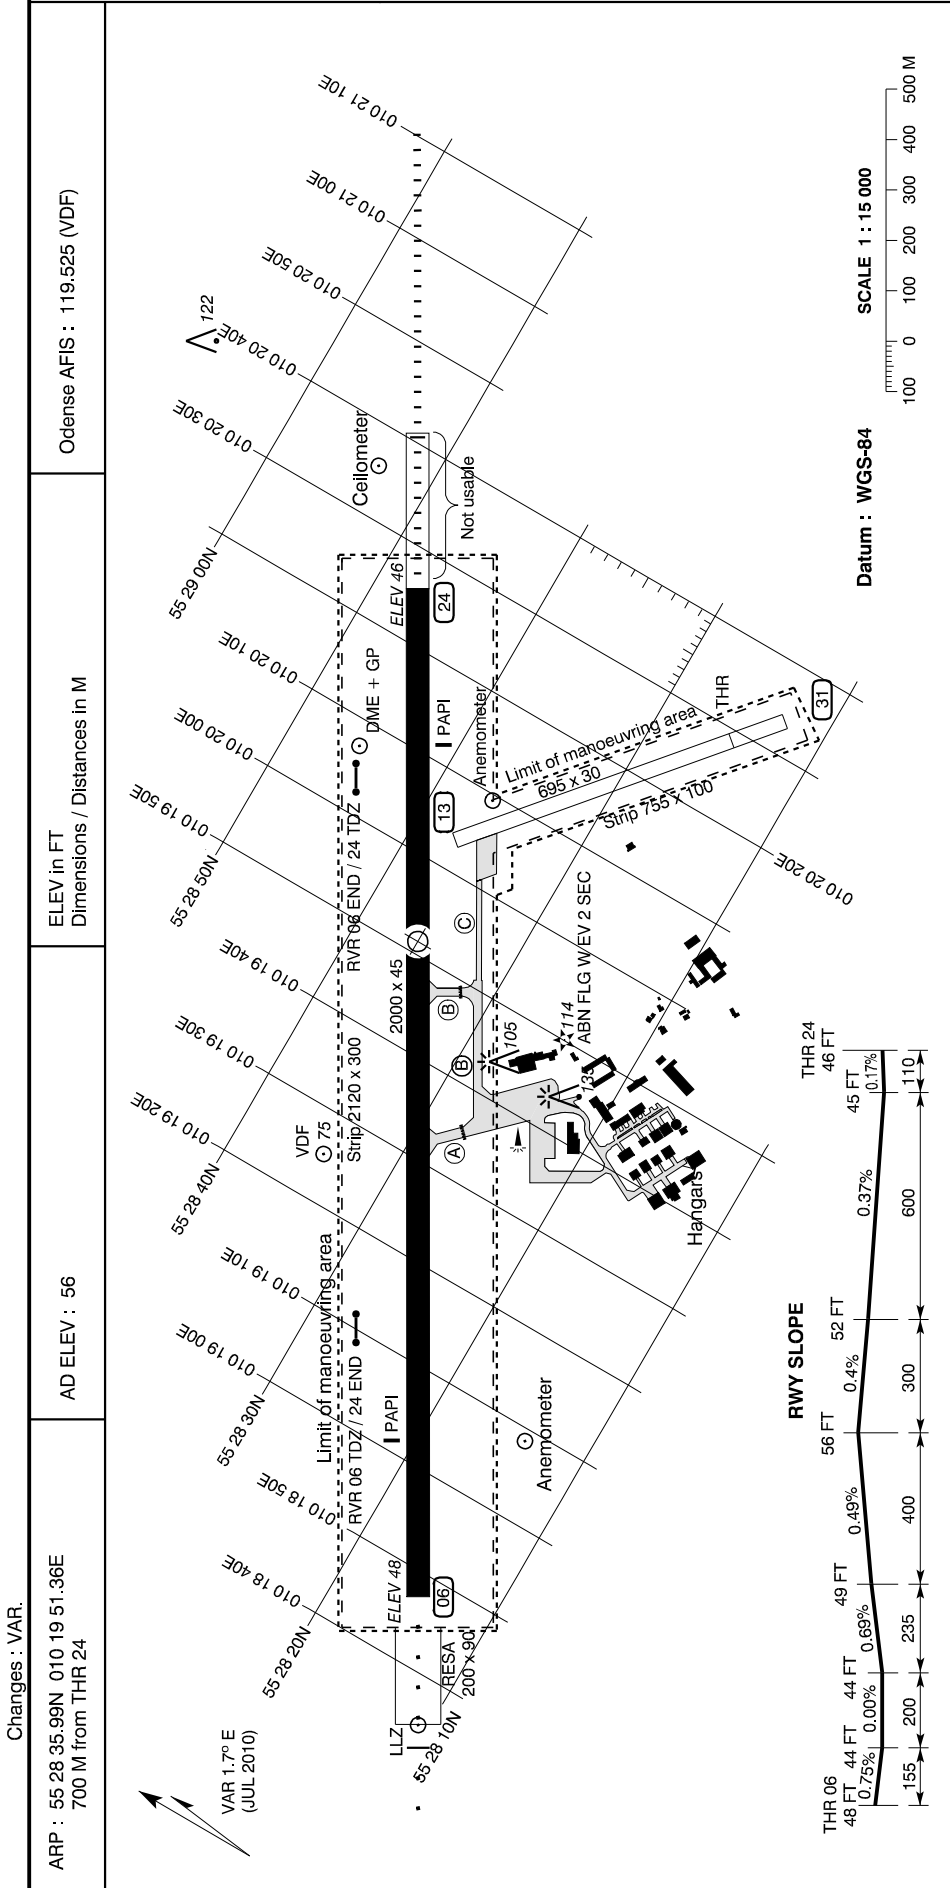

NR	Direction	THR PSN	Pavement Strength	Day marking	Declared distances				APCH and RWY LGT (Unless otherwise stated lighting is LIH adjustable)				Lighting	
					PSN TWY	TORA	TODA	ASDA	LDA	APCH	THR	PAPI		Edge
06	059.8° GEO 058.1° MAG	55 28 14.82N 010 18 47.43E	Asphalt PCN 50 R / D / X / U	THR RWY NR Centre line Edge	A	2000	2000	2000	2000	420 M White	Green	3° MEHT 49 FT	2000 M White	Red
					B	1106	1106	1106	1106	808	808	808	808	808
24	239.8° GEO 238.1° MAG	55 28 47.39N 010 20 25.80E	Composite construction	Centre line Edge	B	2000	2000	2000	2000	900 M White	Green	3° MEHT 51 FT	2000 M White	Red
					A	1207	1207	1207	1207	1207	1207	1207	1207	1207

TAXIWAYS

Width : TWY A : 23 M
TWY B : 18 M
TWY C : 10 M

Pavement : TWY A and TWY B : Asphalt
TWY C : Grass

Strength : TWY A : PCN 36 / F / D / X / U
TWY B : PCN 36 / F / D / X / U

Day marking : TWY A and TWY B :
Centre line, Side stripes,
Holding position

Lighting : TWY A and TWY B :
Blue edge LIL. RGL.

OBSTACLES : All obstacles are marked by day and night

OTHER : RWY 13 : Direction 130° GEO / 128.3° MAG, Grass, TODA 585 M, LDA 695 M
RWY 31 : Direction 310° GEO / 308.3° MAG, Grass, TODA 695 M, LDA 585 M
Secondary power supply : Yes, switch-over time MAX 15 SEC